

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 March 2006 (30.03.2006)

PCT

(10) International Publication Number
WO 2006/033561 A1

(51) International Patent Classification:
B03B 5/56 (2006.01)

(74) Agent: **MAC PATENT & LAW FIRM**; 5th Floor,
Hwaseung Bldg. 15-3, Yangjae-dong, Seocho-gu, Seoul
137-130 (KR).

(21) International Application Number:
PCT/KR2005/003165

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
23 September 2005 (23.09.2005)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2004-0076831
24 September 2004 (24.09.2004) KR

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **SEO BONG RECYCLING CO., LTD.** [KR/KR]; 1522-1, Dadae 1(il)-dong,, Saha-gu,, Busan 604-827 (KR).


(71) Applicant and

(72) Inventor: **KANG, Heon-Chan** [KR/KR]; 205-1702, Samhwan Apt. Dadae 2-dong, Saha-gu, Busan 604-757 (KR).

Published:
— with international search report

[Continued on next page]

(54) Title: METHOD FOR SEPARATION OF CONSTRUCTION WASTE

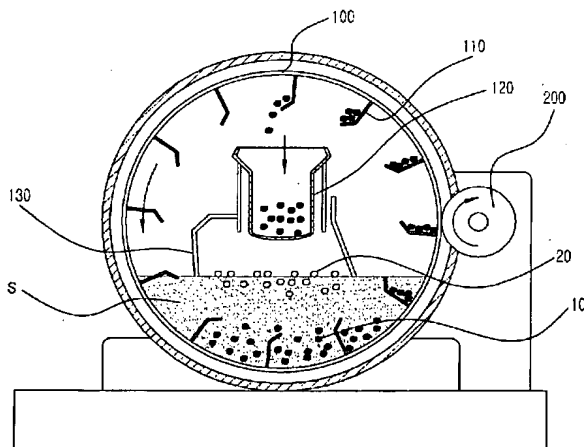

(57) Abstract: Disclosed herein is a method for separation of construction waste. In the method, the construction waste, crushed to a predetermined size, is added to liquid in a precipitation tank and separated into components in the tank according to specific gravity, in which the liquid has a reference specific gravity lower than that of a component to be recovered but higher than that of the remaining components, such that only the component to be recovered is separated by precipitation to the bottom of the precipitation tank. According to the method, high-quality recyclable aggregate contained in the construction waste can be easily separated from other impurities through a simple process. Particularly, the reference specific gravity of the separation liquid is suitably adjusted so that the recyclable aggregate can be easily separated even from impurities (tiles, red brick, asphalt concrete, cement paste mass, etc.) heavier than water, unlike the prior separation process using an aerated water tank.

WO 2006/033561 A1

WO 2006/033561 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.